




MODEL
LINEAR : 100-200
TURRET :200-300

CAPACITY	LINEAR-100/200	TURRET-200/300
SWING OVER BED	275	500
MAXIMUM TURNING LENGTH	200	300
MAXIMUM DIA. BETWEEN CENTER	-	250
DISTANCE BETWEEN CENTER	-	350
STANDARD TURNING DIA.	100	200
CHUCK SIZE	165	200
MAX. TURNING DIA.	200	300
X-AXIS TRAVEL	380	225
Z-AXIS TRAVEL	225	350
RAPID TRAVERSE	24	24
AXES		
X - Z AXIS LM	35	35
Z AXIS BALL SCREW	32 x 10	32 x 10
MOTOR TORQUE (Z axis)	7NM	7NM
X ASIX BALL SCREW	32 x 10	32 x 10
MOTOR TORQUE (X axis)	7NM	7NM
MAIN SPINDLE		
SPINDLE MOTOR : SIEMENS	7.5 / 9	7.5 / 9
FANUC	7.5 / 11	7.5 / 11
SPINDLE BORE	47	47
SPINDLE NOSE	A2-5	A2-5
MAXIMUM BAR CAPACITY	36	36
SPINDLE SPEED RANGE	50-3000	50-3000
FULL POWER SPEED RANGE	750-3500	750-3500
TOOL		
NUMBER OF STATION	-	12 VDI 30
MAX. BORING BAR DIA.	40	32
TOOL SIZE (CROSS SECTION)	25 x 25	20 x 20
LIVE TOOL	as per Required	as per Required
OTHERS		
POSITIONING ACCURACY (MICRON)	±0.010	±0.010
REPEATABILITY (MICRON)	±0.005	±0.005

* BOX GUIDE WAY RAPID 20m/Min.

NOTE : Specification Subject to Change without Prior Notice.

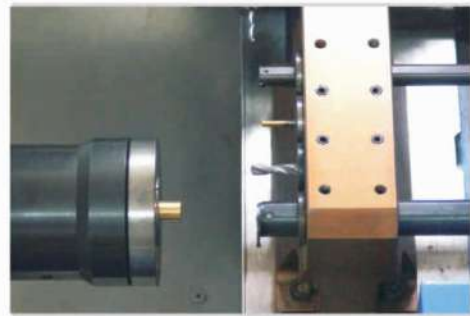

APPLICATION :

